

#### **PRODUCT DESCRIPTION**

The MexFil™ WMC200 dNF40 nanofiltration modules can be used for:

- Applications to treat ground and surface water, and for reuse of industrial or municipal wastewater effluents;
- The removal of organics, many (micro)pollutants, softening in combination with partial desalination producing potable water or process water;
- A wide range of process applications including caustic cleaning fluid recycling due to the excellent pH tolerance;
- Inside-out operation, typically in a crossflow filtration mode, cleaning regularly by a combination of forward flush, module feed-side drain and a backwash supported by a chemically enhanced forward flush, providing perfect control of the membrane fouling rate;
- Vertical mounting inside a skid being plug-and-play compatible for the replacement of modules in existing installations.

The unique hollow fiber nanofiltration modules replace the 2-step conventional treatment of a hollow fiber ultrafiltration module followed by a spiral wound nanofiltration or reverse osmosis module by one simple step.

#### **MEMBRANE SPECIFICATIONS**

Membrane material	Modified PES with a high chlorine tolerance
Nominal MWCO*	400 Da
Nominal membrane rejection for MgSO <sub>4</sub> **	93%
Membrane charge	Negative charge @ pH=7
Nominal fiber ID	0.7 mm

\* Molecular Weight Cut-Off (MWCO) is an estimation as it depends on size, shape, charge and polarity of the compound being tested as well as the test conditions.  
 \*\* Test conditions: 600 mg/l MgSO<sub>4</sub>, 2.5 bar, 25 °C, v=0.5 m/s.

#### **MODULE SPECIFICATIONS**

##### **Dimensions**


Length (L1)	1537 mm
Outer diameter housing (D1)	200 mm (8 inch)
Inner diameter permeate tube (d1)	42 mm
Nominal membrane area	42 m <sup>2</sup>

##### **Connections**

Type	200 mm (standard flange; dedicated end caps available)
Outer diameter end cap connector (D2)	315 mm

##### **Materials of constructions**

Housing	PVC-U Cream
Internals	ABS/PP
Potting material	Epoxy resin

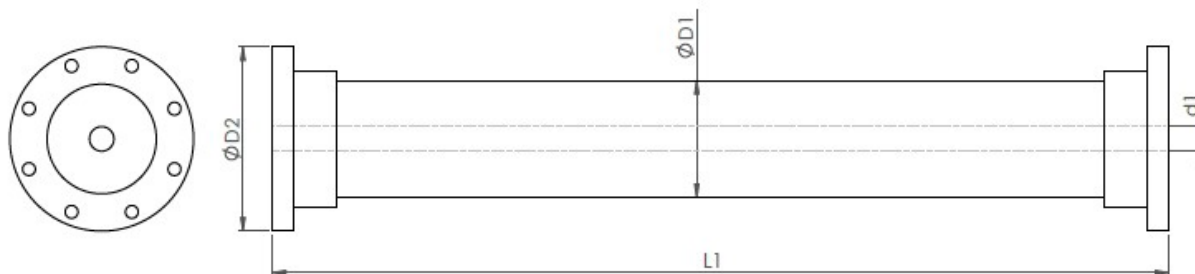

#### **PRODUCT CERTIFICATION**

According to NSF, KTW and Kiwa ATA regulations.